



**Catena grado 80
Lifting chain G80**

Applicable norms: UNI EN 818-2


Acciaio legato Alloy steel

Grado 80

Finitura Finishing

- Zincata elettrolitica
Electro galvanized

Imballo Packaging

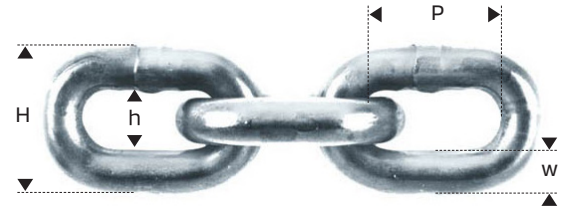

codice art. art. code	w mm	p mm	h min. mm	H max. mm	peso kg/mt weight kg/mt	carico lav. ton WLL ton	carico rott. kN BF kN	fusto drum (200 lt) mt	fusto drum (100 lt) mt	fusto drum (50 lt) mt	fusto drum (30 lt) mt
C08060DZ	6	18	7,8	22,2	0,83	1,1	45,2	600	-	-	100
C08070DZ	7	21	9,1	25,9	1,17	1,5	61,6	500	-	100	-
C08080DZ	8	24	10,4	29,6	1,51	2,0	80,4	400	-	100	-
C08100DZ	10	30	13,0	37,0	2,25	3,2	126,0	200	100	-	-
C08130DZ	13	39	16,9	48,1	3,90	5,3	212,0	150	50	-	-
C08160DZ	16	48	20,8	59,2	5,79	8,0	322,0	100	50	-	-
C08190DZ	19	57	24,7	70,3	8,39	11,2	454,0	75	25	-	-
C08200DZ	20	60	26	74	9	12,5	503,0	50	-	-	-

La catena puo' essere venduta anche in matasse. Per maggiori informazioni contattate l'ufficio commerciale.
The chain can also be sold in bundles. For more information, contact the sales office.

