




**Grillo a cuore ad alta resistenza
Screw pin bow shackle HR**

Acciaio Carbon steel

- Zincato a caldo con perno verniciato rosso
Hot dipped galvanized with red pin

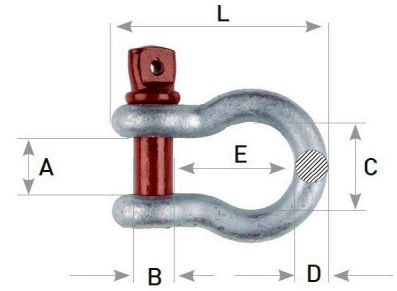

codice art. art. code	mis. pollici size inches	mis. mm size mm	q.tà per scatola q.ty per box	peso kg weight kg	carico lav. ton. W.L.L. tons	carico rott. ton. B.L. tons	A ±1,2 mm	C ±1,2 mm	D ±0,5 mm	L ±2 mm	E ±2 mm	B ±1 mm
RL07-1102/6	1/4	6	10	0,05	0,50	3,00	11,9	19,8	6,4	46,8	28,7	7,9
RL07-1103/8	5/16	8	10	0,09	0,75	4,50	13,5	21,3	7,9	53,0	31,0	9,7
RL07-1104/10	3/8	10	10	0,14	1,00	6,00	16,8	26,2	9,7	63,2	36,6	11,2
RL07-1105/11	7/16	11	10	0,17	1,50	9,00	19,1	29,5	11,2	78,0	42,9	12,7
RL07-1106/12	1/2	12	10	0,33	2,00	12,00	20,6	33,3	12,7	83,3	47,8	16,0
RL07-1107/16	5/8	16	10	0,62	3,25	19,50	26,9	42,9	16,0	106,5	60,5	19,1
RL07-1108/20	3/4	20	10	1,07	4,75	28,50	31,8	50,8	19,1	126,5	71,4	22,4
RL07-1109/22	7/8	22	10	1,64	6,50	39,00	36,6	57,9	22,4	148,0	84,1	25,4
RL07-1110/25	1	25	5	2,28	8,50	51,00	42,9	68,3	25,4	167,0	95,3	28,7
RL07-1111/28	1+1/8	28	5	3,36	9,50	57,00	46,0	73,9	29,5	190,0	107,9	31,8
RL07-1112/32	1+1/4	32	4	4,31	12,00	72,00	51,6	82,6	32,8	209,6	119,1	35,1
RL07-1113/35	1+3/8	35	3	6,14	13,50	81,00	57,2	92,2	36,1	232,7	133,3	38,1
RL07-1114/38	1+1/2	38	3	7,81	17,00	102,00	60,5	98,6	39,1	254,0	146,0	41,4
RL07-1115/45	1+3/4	45	1	12,61	25,00	150,00	73,2	127,0	46,7	313,5	177,8	50,8
RL07-1116/50	2	50	1	20,43	35,00	210,00	82,6	146,0	52,8	347,5	196,8	57,2

